



NESSCAP® Ultracapacitor Products


Features

EDLC(Electric Double Layer Capacitor)
Weldable terminals
Ultra low internal resistance
Highest power performance available



Dimension in mm (not to scale)

Dimension

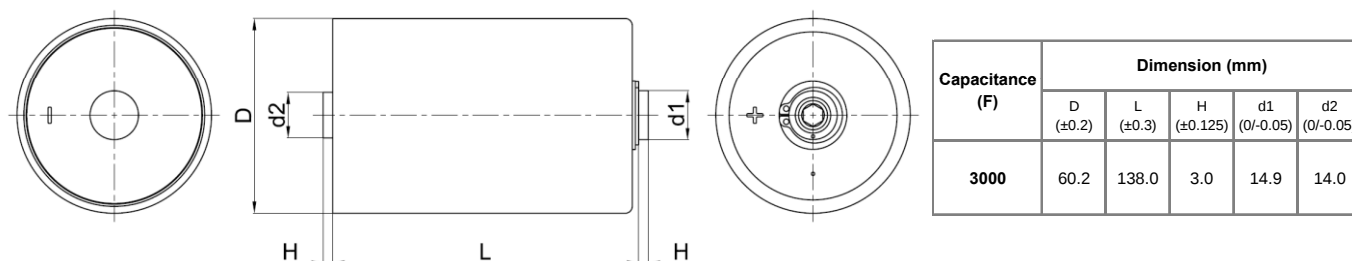

Product & Spec.

Rated Capacitance (F)	Internal Resistance (mΩ)		Max. Current (A)	Leakage Current (mA)	Stored Energy (Wh)	Specific Energy (Wh/kg)	Nominal Weight (g)	Part Number
Discharge with constant current at 25°C	AC(100Hz)	DC	1 sec discharge rate to 1/2V _R	72hours, 25°C	at V _R	Gravimetric		
3000	< 0.22	< 0.26	2,275	< 5.20	3.038	5.73	530	ESHSR-3000C0-002R7A5

Rated Voltage, V _R	2.7 V	
Surge Voltage	2.85 V	
Capacitance Tolerance	0% / +20%	
Operating Temperature Range	-40 ~ 65 °C	ΔC < 5% and ΔESR < 50% of initial value measured at 25°C
Storage Temperature Range	-40 ~ 70 °C	
Life Time at RT ⁽¹⁾	10 years	(1) ΔC < 30% and ΔESR < 150% of specified value, respectively and LC < specified value
Cycle Life (25°C) ⁽¹⁾⁽²⁾	1,000,000 cycles	(2) Cycled between rated voltage and half rated voltage under constant current at 25°C

* Life time is a provisional value

© NESSCAP 2009. All Rights reserved. Design, Specifications are subjected to change without notice.

Nesscap Co., Ltd.
(446-901) 750-8, Gomae-dong, Giheung-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-289-0721 Fax: +82-31-286-6767 e-mail: marketing@nesscap.com
www.nesscap.com

ISO 9001, ISO 14001, TS 16949